

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS

Robert B. Smith
LICENSED LANDSCAPE ARCHITECT

August 15, 2008
PLANS Approval DATE




The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.

STATE OF CALIFORNIA


To accompany plans dated _____

NOTES:


1. See Standard Plan T51 for Temporary Silt Fence.
2. Dimensions may vary to fit field conditions.

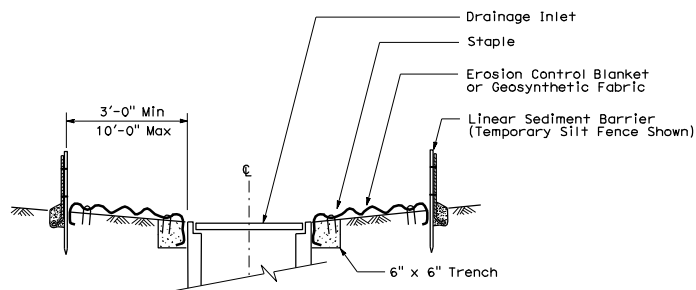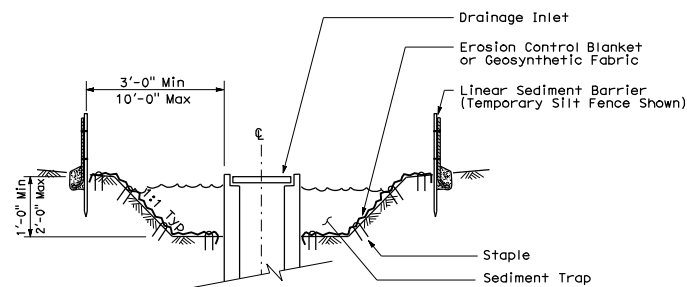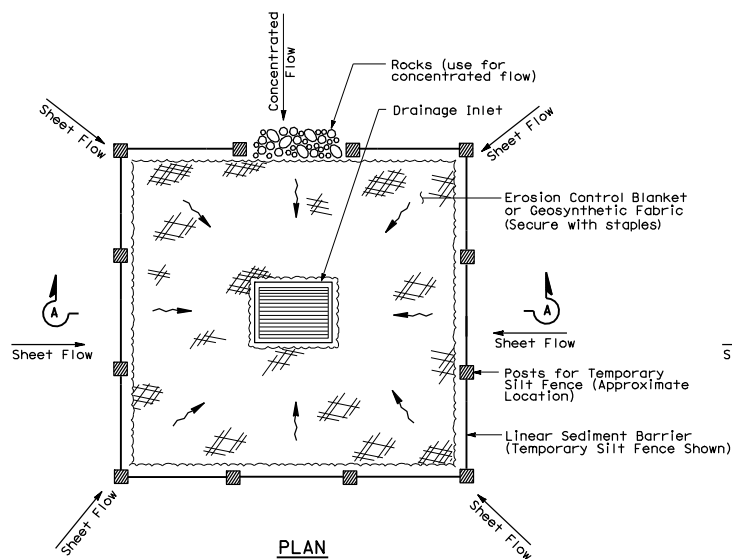**SECTION A-A****SECTION B-B**

**TEMPORARY DRAINAGE
INLET PROTECTION (TYPE 1)**

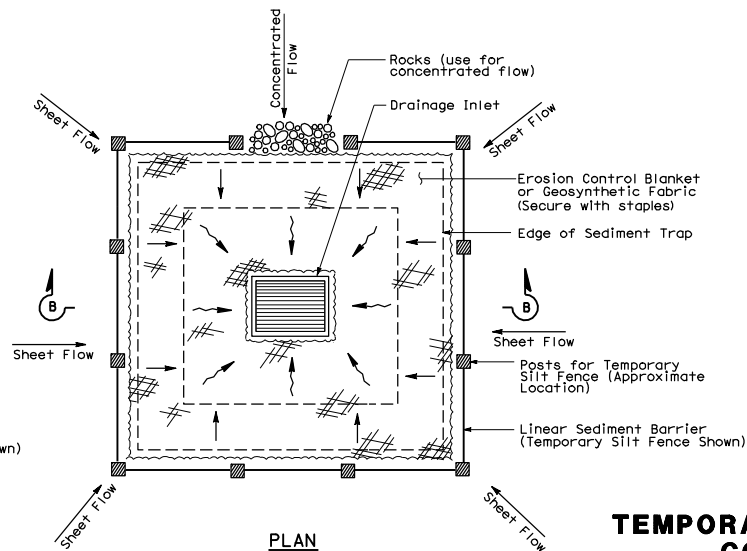

**TEMPORARY DRAINAGE
INLET PROTECTION (TYPE 2)
(EXCAVATED SEDIMENT TRAP)**

**STAPLE DETAIL**


STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION

**TEMPORARY WATER POLLUTION
CONTROL DETAILS
(TEMPORARY DRAINAGE
INLET PROTECTION)**

NO SCALE

NSP T61 DATED AUGUST 15, 2008 SUPPLEMENTS
THE STANDARD PLANS BOOK DATED MAY 2006.

NEW STANDARD PLAN NSP T61

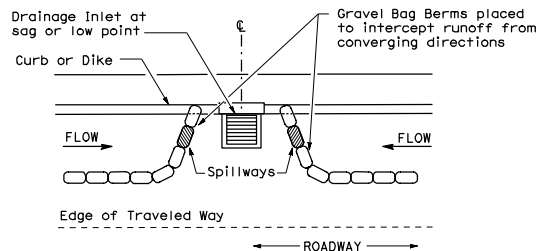


PLAN


CONFIGURATION FOR SAG POINT INLET (GRAVEL BAG BERM)

GRAVEL BAG BERM (TYPE 3A) SPACING TABLE					
SLOPE OF ROADWAY (PERCENT)	1 to 3.9	4 to 5.9	6 to 7.9	8 to 10	10+
INTERVAL BETWEEN BERM	100'	75'	50'	25'	12'


For slope of less than 1%, install barriers only if erosion/sediment is prevalent

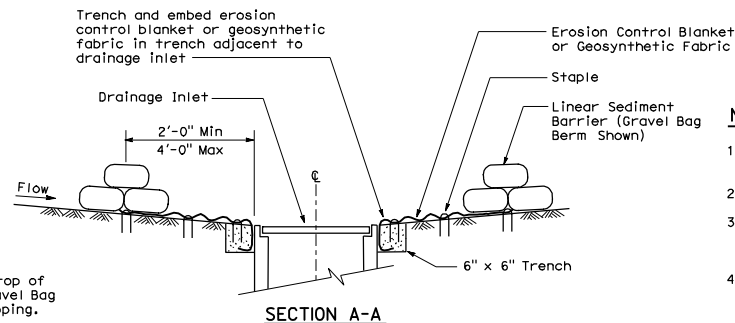

SECTION A-A

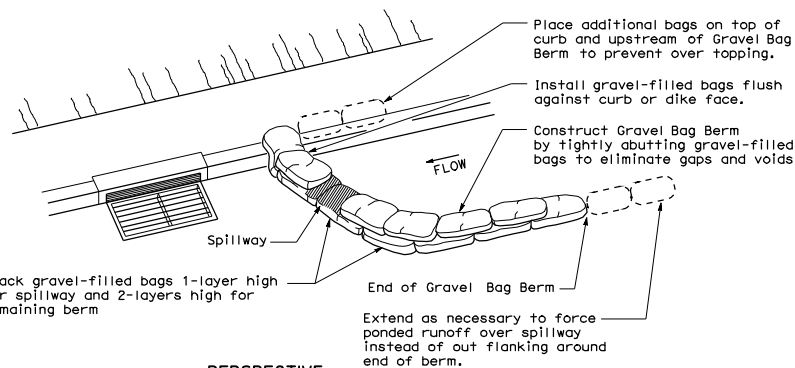


PERSPECTIVE

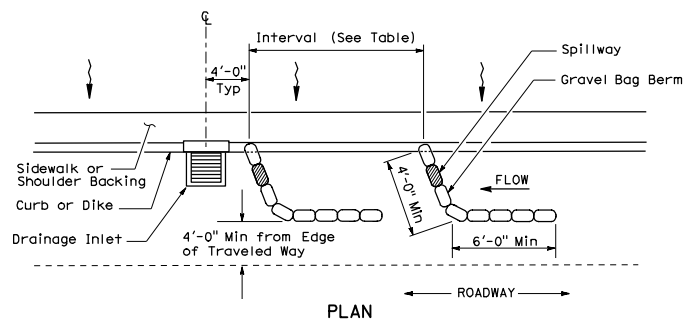


PLAN

TEMPORARY DRAINAGE INLET PROTECTION (TYPE 3A) (GRAVEL BAG BERM)

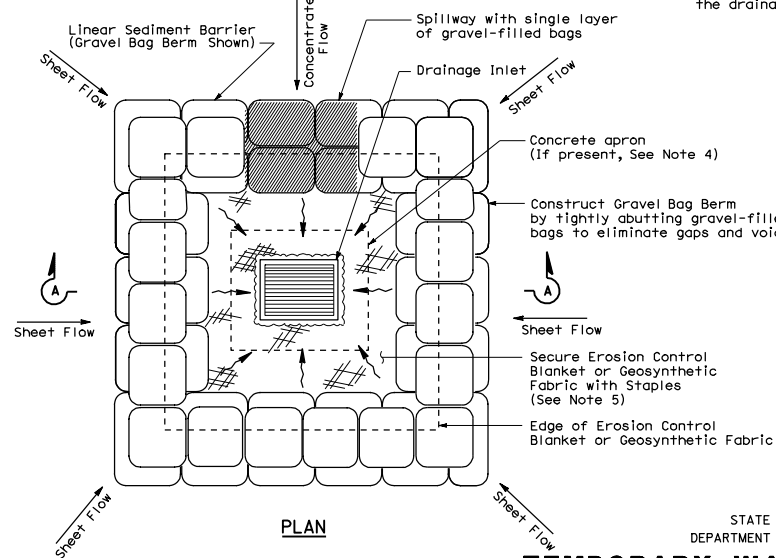

PLAN

TEMPORARY DRAINAGE INLET PROTECTION (TYPE 3B)



STAPLE DETAIL

NOTES:

1. Place safety cones adjacent to drainage inlet protection.
2. Dimensions may vary to fit field conditions.
3. Install a minimum of 3 gravel bag berms upstream of each drainage inlet to be protected.
4. Position erosion control blanket or geosynthetic fabric at edge of concrete apron and secure in trench.
5. Erosion control blanket or geosynthetic fabric is not required if the area adjacent to the drainage inlet is vegetated or paved.

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS

Robert B. Smith
LICENSED LANDSCAPE ARCHITECT

August 15, 2008
PLANS APPROVAL DATE

The State of California and its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.

STATE OF CALIFORNIA

To accompany plans dated _____

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION

TEMPORARY WATER POLLUTION CONTROL DETAILS (TEMPORARY DRAINAGE INLET PROTECTION)







NO SCALE

NSP T62 DATED AUGUST 15, 2008 SUPPLEMENTS
THE STANDARD PLANS BOOK DATED MAY 2006.

NEW STANDARD PLAN NSP T62

FLEXIBLE SEDIMENT BARRIER SPACING TABLE

SLOPE OF ROADWAY (PERCENT)	0 to 0.9	1 to 1.9	2 to 2.9	3 to 4	5+
INTERVAL BETWEEN BARRIERS	50'	35'	30'	25'	20'
ANGLE FROM FACE OF CURB	70°	70°	70°	45°	45°
SUGGESTED BARRIER LENGTH	6'	6'	6'	6'	6'

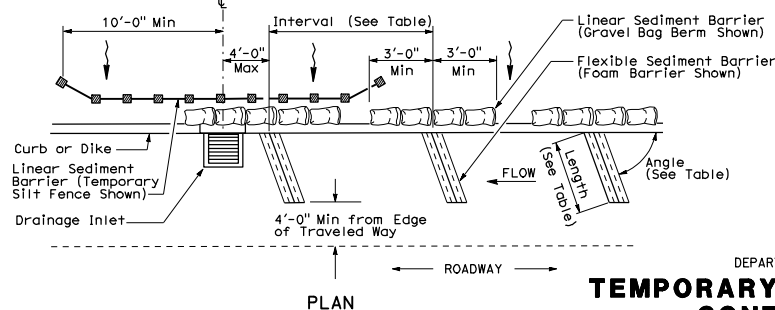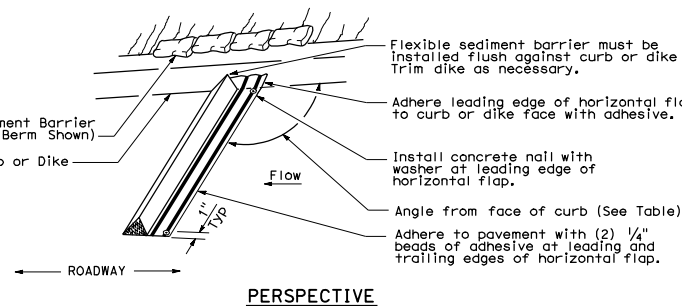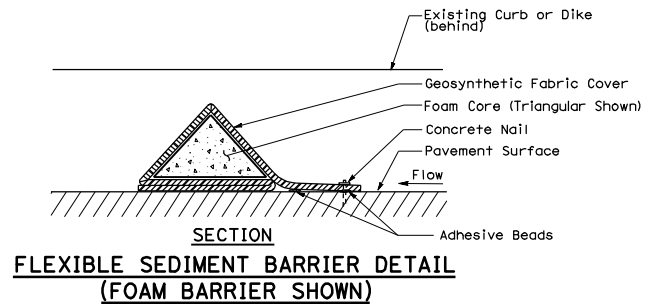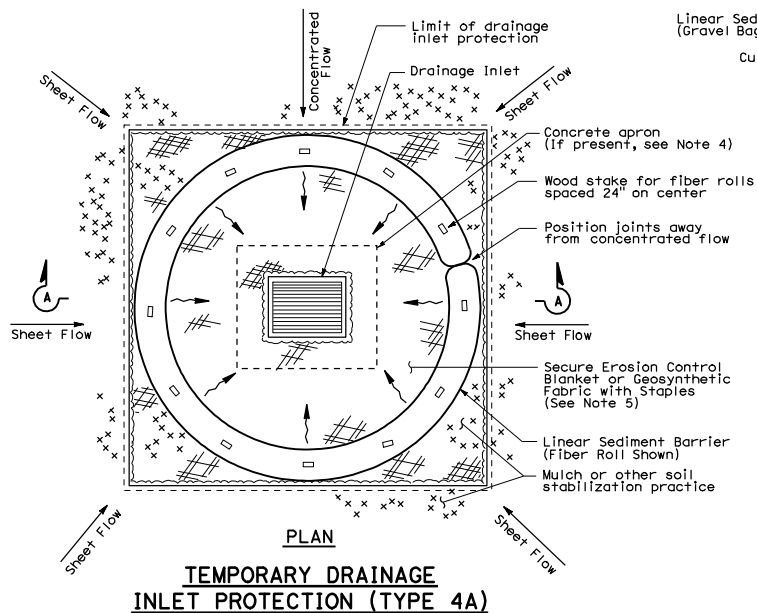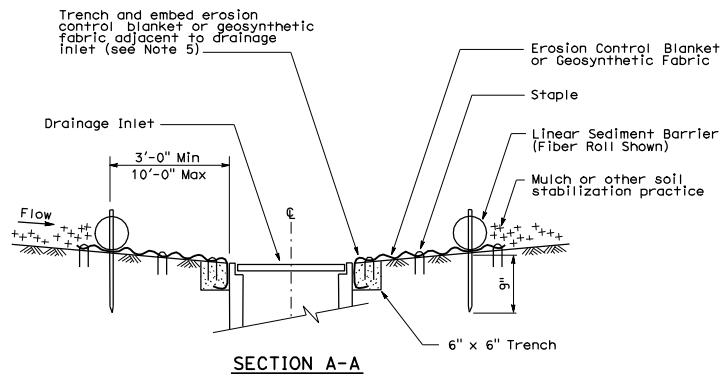

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS

August 15, 2008
PLANS APPROVAL DATE

The State of California or its officers or agents, shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.

To accompany plans dated _____

NOTES:

- See Standard Plan T51 for Temporary Silt Fence.
- Dimensions may vary to fit field conditions.
- Install a minimum of 3 flexible sediment barriers upstream of each drainage inlet to be protected.
- Position erosion control blanket or geosynthetic fabric at edge of concrete apron and secure in trench.
- Erosion control blanket or geosynthetic fabric is not required if the area adjacent to the drainage inlet is vegetated.


STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION

TEMPORARY WATER POLLUTION CONTROL DETAILS (TEMPORARY DRAINAGE INLET PROTECTION)


NO SCALE

NSP T63 DATED AUGUST 15, 2008 SUPPLEMENTS
THE STANDARD PLANS BOOK DATED MAY 2006.


NEW STANDARD PLAN NSP T63

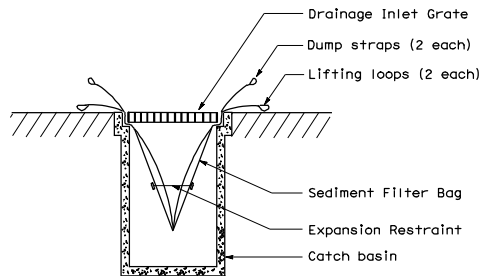


SECTION B-B
SEDIMENT FILTER BAG DETAIL

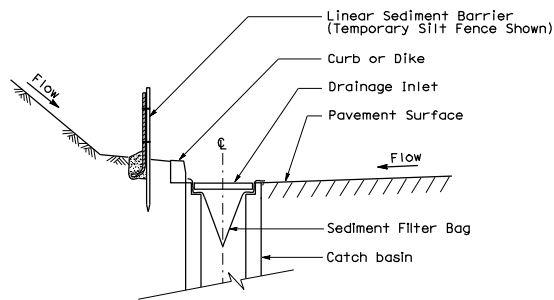


SECTION A-A

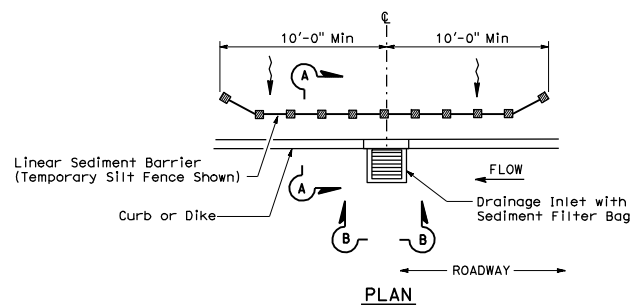

TEMPORARY DRAINAGE
INLET PROTECTION (TYPE 5)
(SEDIMENT FILTER BAG)

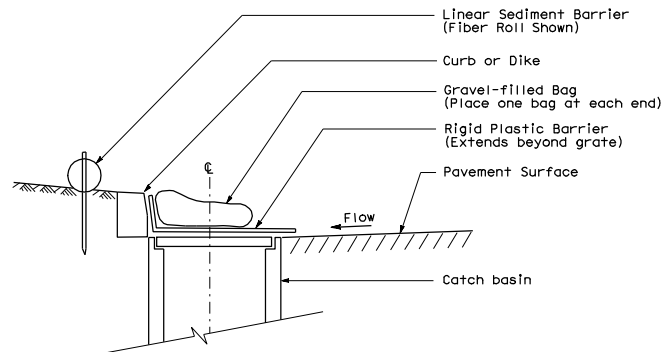

SECTION
TEMPORARY DRAINAGE
INLET PROTECTION (TYPE 6A)
(CATCH BASIN WITH GRATE)

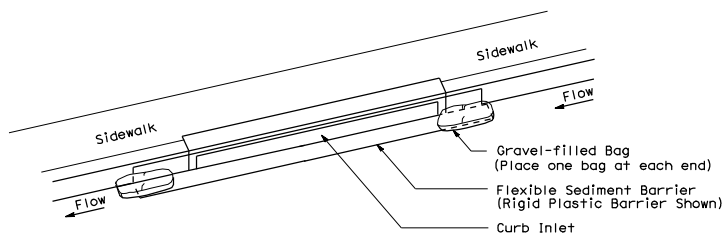

PERSPECTIVE
TEMPORARY DRAINAGE
INLET PROTECTION (TYPE 6B)
(CURB INLET WITHOUT GRATE)

DIST.	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS

Robert B. Smith
LICENSED LANDSCAPE ARCHITECT

August 15, 2008
PLANS APPROVAL DATE

The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.

STATE OF CALIFORNIA

To accompany plans dated _____

NOTES:

1. See Standard Plan T51 for Temporary Silt Fence.
2. Dimensions may vary to fit field conditions.

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION

TEMPORARY WATER POLLUTION
CONTROL DETAILS
(TEMPORARY DRAINAGE
INLET PROTECTION)

NO SCALE

NSP T64 DATED AUGUST 15, 2008 SUPPLEMENTS
THE STANDARD PLANS BOOK DATED MAY 2006.

NEW STANDARD PLAN NSP T64